




30" Pipe Headwall Flared
with 45 degree angle



30" Pipe Headwall Flared
with 25 degree angle



Special Headwall with
4- 48" pipe openings
and 1- box culvert opening

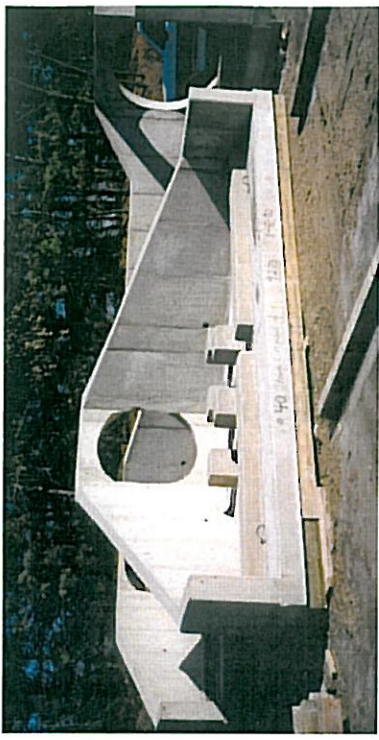

Pipe Headwall Special
with Enery Dissipator Blocks

McCann Concrete Products, Inc.
8709 State Route 159
Dorsey, IL 62021



MCCANN CONCRETE PRODUCTS, INC.
8709 STATE ROUTE 159
DORSEY, IL 62021
618-377-3888
FAX 618-377-7746

CONTRACTOR _____

CONTRACT # _____

STRUCTURE # _____

STATION _____

SLOPE RATIO _____

PIPE DIA _____

GENERAL NOTES

REINFORCEMENT SIZING AND PLACEMENT IN ACCORDANCE WITH STD. SD# 94-16A & B.



ALL PRECASTING IN ACCORDANCE WITH APPLICABLE ILLINOIS TOLL HIGHWAY STANDARDS AND SPECIFICATIONS.

REINFORCEMENT BARS SHALL CONFORM TO THE REQUIREMENTS OF AASHTO M-31 OR M-53 GRADE 60.

MINIMUM CONCRETE STRENGTH SHALL BE 5000 P.S.I. AFTER 28 DAYS.

CHANNEL CONCRETE BY CONTRACTOR.

NOT TO SCALE.

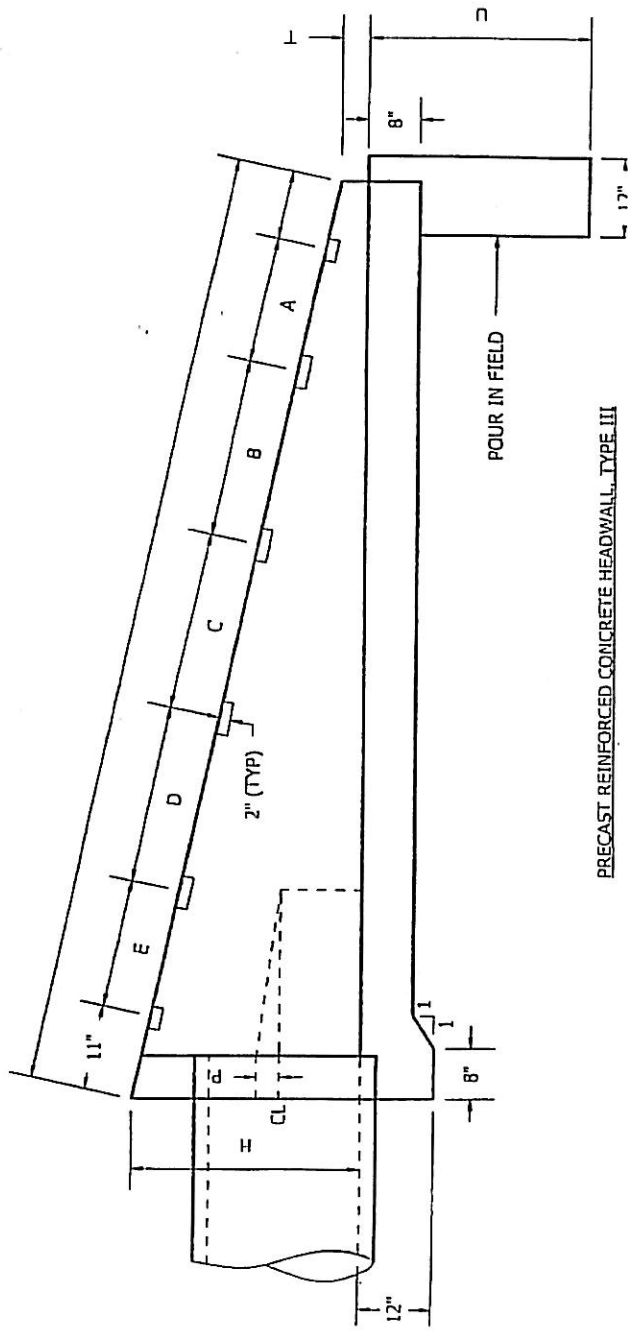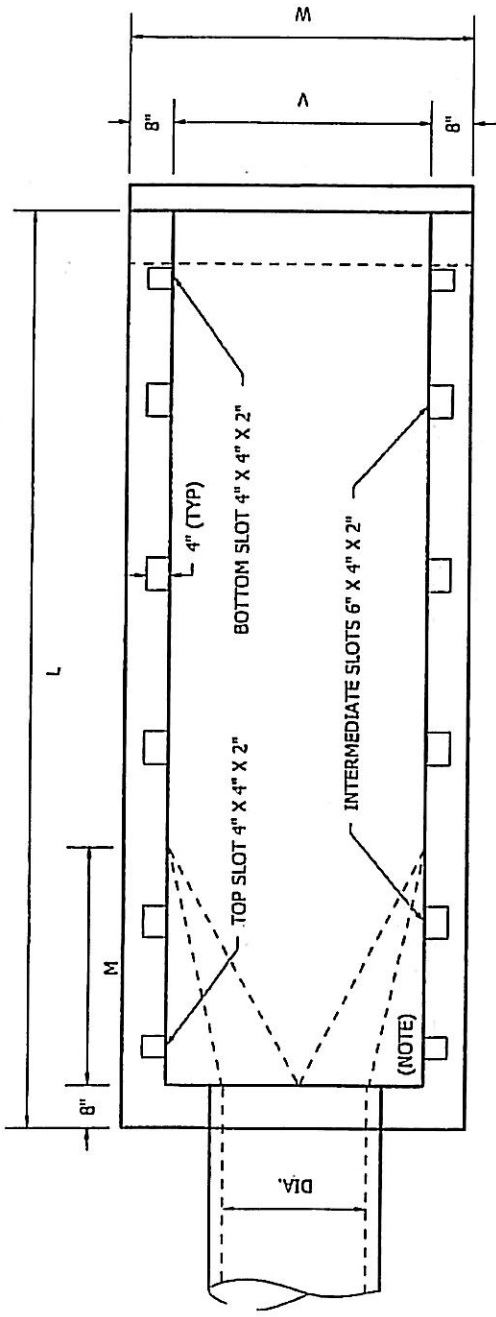

PRECAST REINFORCED CONCRETE HEADWALL, TYPE III

